


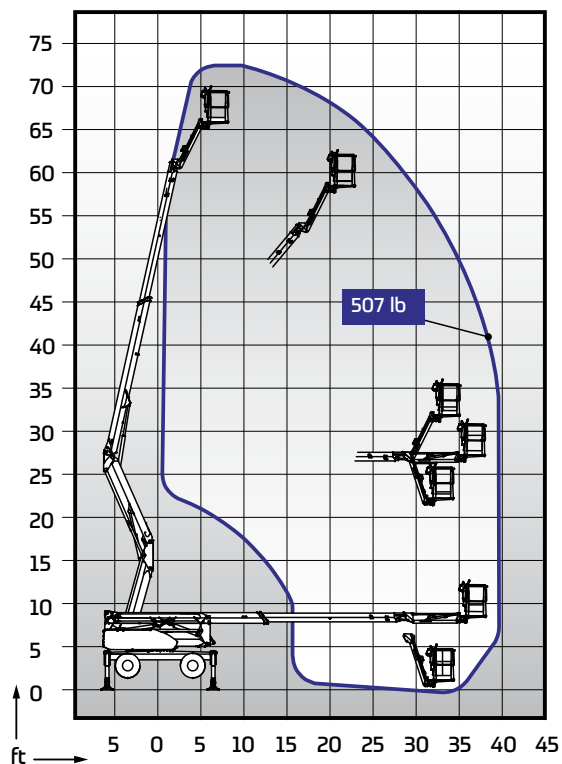

Technical data

	72RXT
Max. working height	72 ft 2 in
Max. platform height	65 ft 7 in
Max. outreach	39 ft 4 in
Support width	15 ft 1 in / 13 ft 9 in
Lifting capacity	507 lbs / 551 lbs*
Basket size	2 ft 4 in x 4 ft 3 in / 2 ft 6 in x 5 ft 3 in*
Boom rotation	continuous
Basket rotation	180°
Boom control	CAN-BUS, proport.
Jib	5 ft 3 in / 140°
Transport length	20 ft 10 in
Transport width	81 in
Transport height	7 ft 9 in
Weight lbs	10360
Approach / departure angles	33.4°
Ground clearance	1 ft 1 in
Four wheel drive	std
Steering, 2WS / 4WS / Crab	std
AC socket in the basket x 2	std
Power source	Kubota D1105 EU Stage V, EPA/CARD Tier 4 Final
Power kW (cont./peak)	18.5 kW
Electric motor 110/230VAC*	Only for boom movements
Automatic levelling	std
Gradeability	40 %
Drive speed	6.2 / 1.7 mph

*) option